



KODIAK SERIES 3

US PH. 8-888-827-0172
US FAX 8-888-827-0172

LOADER TRAILERS

WITH HYDRAULIC ELEVATORS
AND LARGE PLATFORM FEET



MODEL 148 LTDK KODIAK HYDRAULIC DELIMBER TRAILER



Large 3/4"
Platform Feet

Standard Features


- Length 48'6"
- Width 34.25"
- Height 39"
- Tires - 11-22.5 (New)
- Frame Construction - 16" WF Main Rails @ 50 lbs/ft
- Landing Gear - Patented Kodiak Hydraulic Style
- Axles - (2) 25,000 lbs. Cap with Unimount Hubs and Drums
- Brakes - Air (On All Wheels - I.C.C. Regs)
- Rims - Disc 10-Hole Piloted (Unimount)
- Lights - Rubber Insulated Sealed Beam with Marker, Stop and Directional Turn Signals
- Bumper - Push-Pull Type I.C.C. Regs
- Pull Bar - Extendable and Retractable, Located on Front of Neck - Heavy Duty Reinforced
- Delimeter Hydraulic Plumbing Kit - Min. 3500 PSI
- Hydraulic Tubing Supply Lines on Insulated Brackets inside of Main Rails
- Landing Gear Hydraulic Cylinder 3.5" Bore and 2.5" Rod
- 5000 PSI System Load Lock Valves

Options

- Stand for Boom Heel
- Third (3rd) Axle
- Without Hydraulic Plumbing Kit (deduct)
- Radial Tires and Other Higher Load Capacity Tires for Larger Loaders

Benefits of the Kodiak Hydraulic Style Landing Gear

- All setup functions are controlled from the comfort and safety of the loader cab.
- Independent hydraulic elevators adjust height and level of trailer on uneven terrain.
- Large platform feet provide more flotation to prevent landing gear from sinking into the ground, and can be raised hydraulically on demand.
- Reduces labor costs by allowing one person to perform all setup and moving duties.

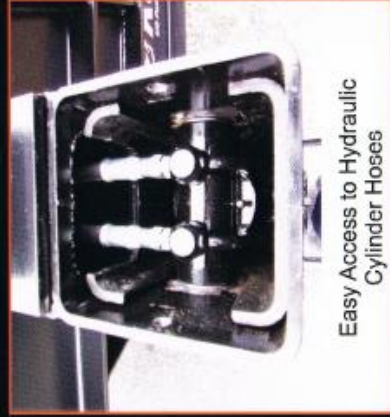

Easy Access to Hydraulic
Cylinder Hoses



Heavy Duty Top Cylinder Cover
Flush with Housing



Neat, Professional Mounting of
Tubes, Hoses, and Valves

Manufactured by Big John Trailers for Kodiak, LTD